


Axiom



The new generation of our powerful and reliable Axiom hardware line extends functionality while reducing the size of the package. Utilizing latest developments in electronic component technology it packs more functionality and features into a smaller size without sacrificing serviceability.



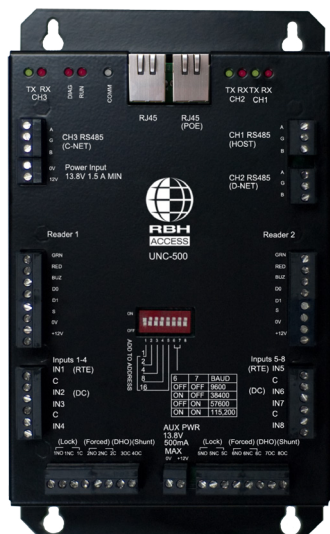


Next generation 32-bit processor with hardware encryption and expanded memory, drastically increases the system capacity in doors, cards and history event log while opening exciting opportunities of new functionality.

Certain UNC-500 controller models come equipped with IEEE 802.3at compliant PoE capability. Augmented with onboard battery backup with the ability to bolster power output when necessary.

19" rack mount for IT style configurations or wall mount for more traditional installations, UNC-500 delivers a lot of features in an attractive package. Wall mount unit fits into existing enclosures and if ordered with metal protective shell can be mounted directly on back boards or inside of 3rd party cabinets. Compact rack mount foot print efficiently utilizes rack space to provide 2 or 4-door packages in a slim and functional design.

Q-V-500

Universal Network Edge Controller





























































Processor / Memory:	32-bit Processor / 2MB, 4MB or 8 MB
Memory Capacity:	Cards 50,000 - 300,000 (Depending on the model)
Event Log	30,000 - 100,000 (Depending on the model)
Host Communications:	Built in TCP/IP, RS-485
Field Communications:	Fully programmable, multiple hardware configurations
Ports / Circuit Type	1 or 3 (Dependent on model) RS-485 programmable (Supports OSDP, Wireless Locks, Etc.)
Cable Requirement	Shielded, twisted pair, 20 - 22 AWG; 4,000 ft (1,200 m) total
Doors / I/O / Other:	8 (2-onboard) / 320 (16 onboard) / 254 SafeSuite Keypads
On board Reader Ports:	2 with up to 5 concurrent card formats each
Audio/Visual Controls	Red and Green reader LED, audible controls
Cable Requirement	Shielded, stranded, 6 or 8 conductor, 20 - 22 AWG; Max 500 ft (150 m) @ 20 AWG
Programmable Inputs:	8 + Cabinet Tamper Input
Circuit Types	N.O. or N.C with no supervision, single or dual EOL supervision.
Programmable Outputs:	8 (4 relays + 4 voltage outputs)
Relays	Form C relays, SPDT, 5 A @30 VDC, dry contacts; Fail Safe/Secure programmable
Power:	Current Draw 1.5 A @ 13.8VDC (backup battery charger requires 13.8 - 15VDC)
Circuit protection	Thermal - Power In, Power Out, Reader Power
PoE (optional)	IEEE 802.3at compliant : 25.5W; Other : 30W
Auxiliary Voltage Outputs	12-14 VDC @ 500 mA
Dimension: Circuit board only	8" H x 5.3" W x 1.5" D
Lockable Enclosure	14" H x 12" W x 3" D
Metal shell	9.75" H x 5.5" W x 1.5" D
19" Rack Mount	1.75" H x 19" W x 15" D
Operating environment:	Temperature: 0 to 70°C (32 - 158°F); Humidity: 20 to 85% RH (non-condensing)
Certifications:	     Listings/certifications are product specific Specifications subject to change without notice.



WWW.RBH-ACCESS.COM

© RBH Access Technologies, Inc. 2016

Axiom

Model #	Housing	Ethernet	RS-485	Memory	Cards	History	Apps	NC-Net	D-Net	C-Net
Q-V-500-222M				 2MB	 50,000	 30,000	Yes	Class "B"+	Class "A","B"+	No
Q-V-500-232M				 2MB	 50,000	 30,000	Yes	Class "B"+	Class "A","B"+	No
UNC-500-400 Series : 2-Door controller, 15 per panel network, each expandable to 8 doors + I/O *, ^										
Q-V-500-422M				 4MB	 100,000	 50,000	Yes	Class "B"	Class "A","B"	No
Q-V-500-425M				 4MB	 100,000	 50,000	Yes	Class "B"	Class "A","B"	No
Q-V-500-432M				 4MB	 100,000	 50,000	Yes	Class "B"	Class "A","B"	No
Q-V-500-435M				 4MB	 100,000	 50,000	Yes	Class "B"	Class "A","B"	No
UNC-500-800 Series : 2-Door controller, 15 per panel network, each expandable to 8 doors + I/O *, **, ^										
Q-V-500-822M				 8MB	 300,000	 100,000	Yes	Class "B"	Class "A","B"	Class "B"
Q-V-500-825M				 8MB	 300,000	 100,000	Yes	Class "B"	Class "A","B"	Class "B"
Q-V-500-832M				 8MB	 300,000	 100,000	Yes	Class "B"	Class "A","B"	Class "B"
Q-V-500-835M				 8MB	 300,000	 100,000	Yes	Class "B"	Class "A","B"	Class "B"

⁺NC-Net and D-Net are both supported configurations when used independently. ^{^^}Replacement circuit boards are listed in the parts/price lists.



WWW.RBH-ACCESS.COM
© RBH Access Technologies, Inc. 2016